



POLYKEN® 510
Premium Vinyl-Coated Cloth
Gaffers Tape


APPLICATIONS

- Used to protect and anchor wiring in the photography and film industry.
- Bookbinding.
- Vinyl seat repair.
- Wrapping or bundling wire, metals, and plastics.
- Moisture and dust-proof sealing of equipment cases and film canisters.
- Designed to withstand exterior weather and temperature applications.

FEATURES & BENEFITS

- Heavy-duty vinyl-coated waterproof cloth with excellent conformability.
- High tack tape with excellent adhesion for superior performance.
- Non-reflective, low-gloss backing.
- Excellent performance over a wide temperature range.
- Clean removal adhesive.
- High thread count for a clean, straight tear.
- Complies with VOC requirements of SCAQMD Rule 1168
- **Contributes toward satisfying EQ Credit 4.1 (Low Emitting Materials Adhesives & Sealants) under LEED®.**

CONSTRUCTION

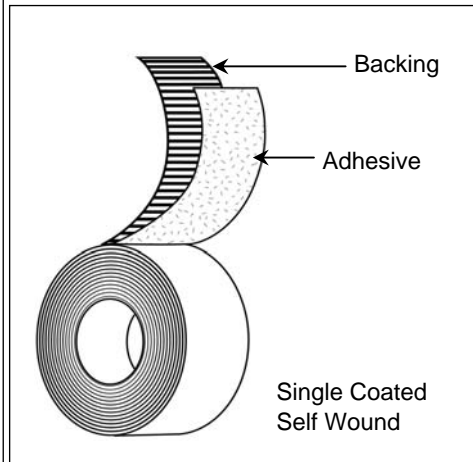

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Vinyl-coated Cloth

Adhesive:

- Rubber

Colors:

- Black, Blue, Brown, Gray, Green, Olive Drab, Red, Yellow, White, Neon Green, Neon Orange, Neon Pink, Neon Yellow

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	11.5 mils	292.10 μ	ASTM D 1000
Adhesion to Steel	50 oz./in.	5.47 N/cm	PSTC-1
Adhesion to Backing	29 oz./in.	3.17 N/cm	PSTC-1
Tensile Strength	42 lb./in.	73.55 N/cm	ASTM D 1000
Tack (Rolling Ball)	4"		
Maximum Performance Temperature	200 F		
VOC Content	<0.1 g/L		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical person To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all appl federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any responsibility.