

All-Climate Duct Tape

NASHUA[®]
All-Climate Duct Tape

Designed for Extreme Conditions


APPLICATIONS

- Any general purpose application that involves long term outdoor exposure.
- Superior for a variety of winterizing applications.
- Performs well in high UV exposure applications.

FEATURES & BENEFITS

- Suitable for outdoor use in all climates.
- Adheres well to a wide variety of substrates.
- Tears easily, high tensile strength.
- Clean removal after 30 days of outdoor exposure.

CONSTRUCTION

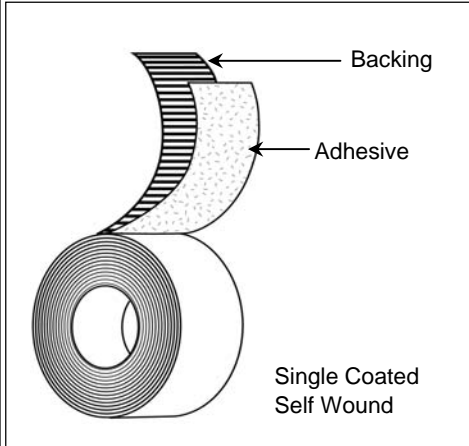

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Polyethylene Coated Cloth

Adhesive:

- Rubber

Colors:

- Black

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	9 mils	228.6 μ	ASTM D 1000
Adhesion to Steel	85 oz./in.	9.30 N/cm	PSTC-1
Adhesion to Backing	65 oz./in.	7.11 N/cm	PSTC-1
Tensile Strength	24 lb./in.	42.03 N/cm	ASTM D 1000
Minimum Application Temperature	30 D F	93 D C	
Performance Temperature Range	-40°F to 160°F -1 °C to 71 °C		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.